



MASSEY FERGUSON

# MF 2200

2240, 2250, 2260, 2270, 2270 XD, 2290



FROM MASSEY FERGUSON



**Page 10**  
Feeding



**Page 12**  
Pre-Compression Chamber



**Page 14**  
Bale Formation



**Page 16**  
Superior Knotters




**Page 18**  
Monitoring and Control



**Page 29**  
Accessories

# Contents

- 04 Quality Manufacturing
- 06 Large Square Balers for all requirements
- 10 Pick-up and Feeding
- 12 Pre-Compression Chamber
- 14 Bale Formation
- 16 Superior Knotters
- 18 Monitoring and Control
- 20 MF 2270 XD baler
- 22 Single and Tandem Axle Options
- 24 Cutting Options
- 26 Servicing Made Easy
- 28 AGCOMMAND Baler Telemetry
- 29 Accessories to suit your requirements
- 30 Total Support. There when you need it.
- 32 Specifications
- 34 Machine Overview

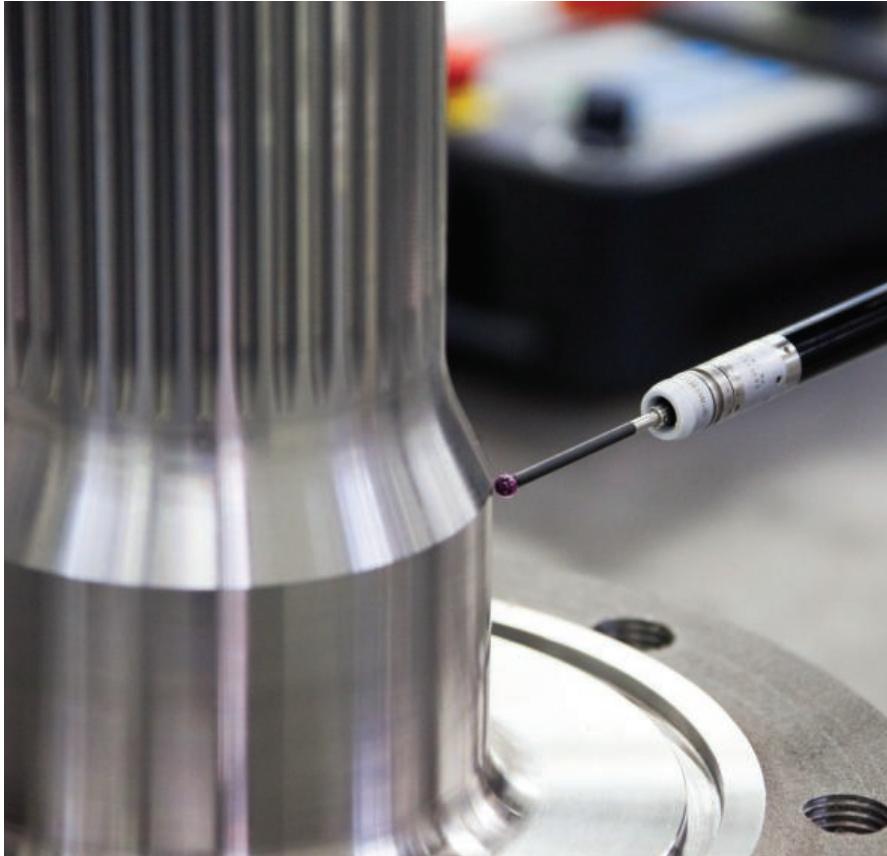


## Hesston, Kansas

In 1991 AGCO purchased the Hesston Corporation, a leading North American brand of hay tools and a 50 per cent participation in the manufacturing joint venture known as Hay and Forage Industries (HFI). Then in 2000 AGCO completed the purchase of Hay and Forage Industries in Hesston, Kansas, solidifying its planned strategy to achieve efficient manufacturing rationalisation by consolidating major operations in North America.

With hundreds of patents to its credit, Hesston® has been the hay and forage innovator since 1955, when the company developed the first commercially available self-propelled windrower. Other industry 'firsts' have included the first hydrostatic windrower, the first centre-pivot mower-conditioner and the first big rectangular baler - which had nearly 50 individual patents of its own.

Today, products built in Hesston continue to lead the way in advanced hay and forage technology. The factory offers mowing systems, conventional, round and large square balers and a range of self-propelled windrowers. These are built alongside the innovative rotary combines marketed throughout the world.

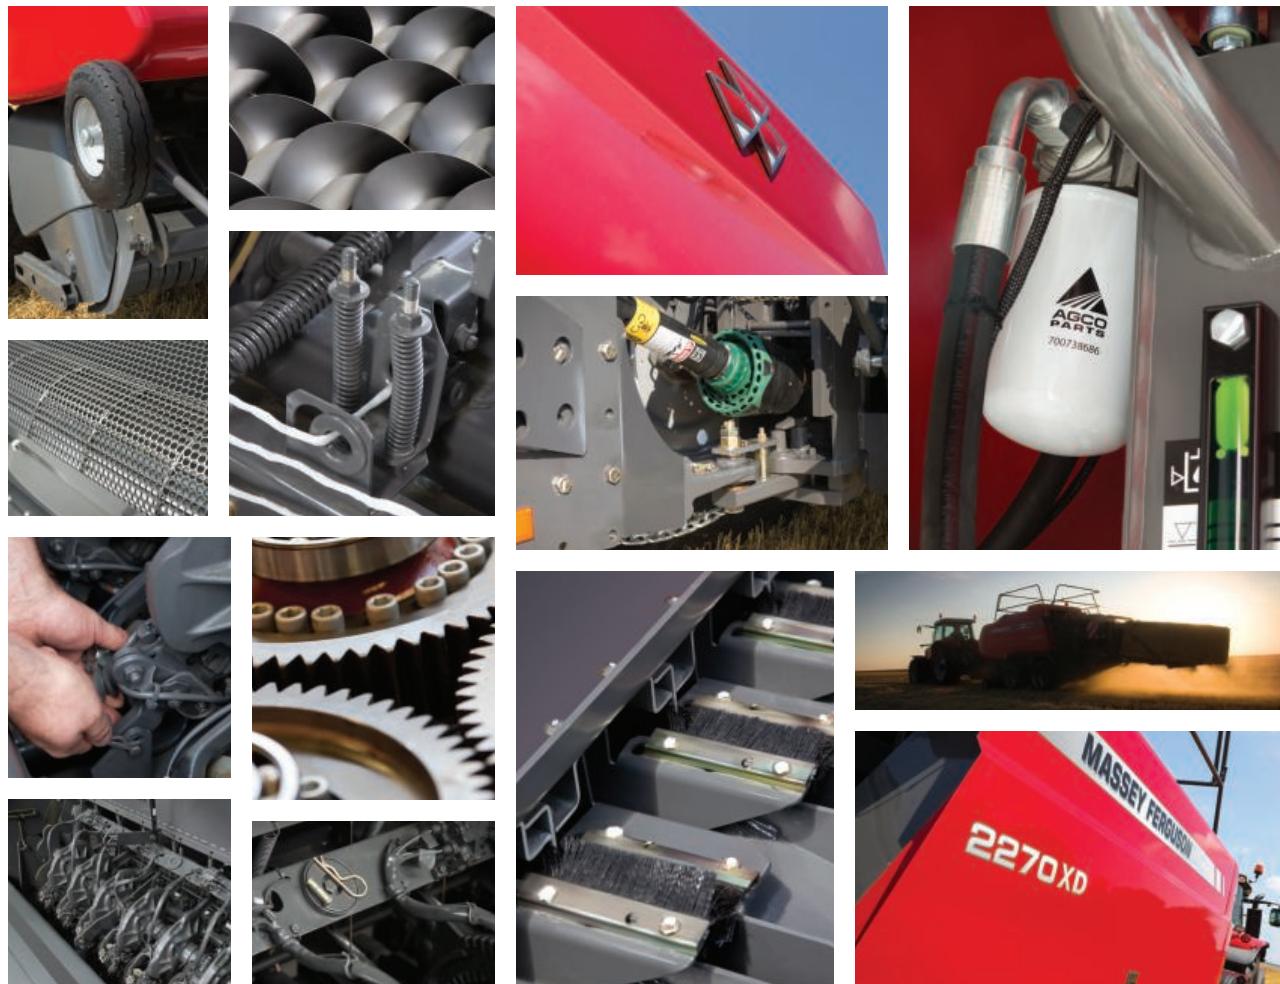



## Purveyor's of the finest large square balers since 1978

The MF 2200 Series of six big square balers introduces a host of innovative features designed to provide farmers with improvements in capacity, bale density and operating efficiency, together with real savings in time and costs. These machines built on the foundation of the MF 2100 Series introduce a number of new features and countless benefits in this highly competitive sector of the market.

The design engineers at Hesston set out to create a family of balers that was simple to operate and maintain, but which incorporated a range of clever developments destined to produce perfect bales – in less time, and transported at less cost. The sleek, modern lines of these machines underline their place at the forefront of baler design.

The MF 2200 Series covers all the common sizes of large square balers required by today's farmers, contractors, hay and straw merchants and industrial consumers of large square bales.

Ultimately, owners of these superb balers will have the reassurance that they have a machine based on proven technology, with 35 years specialist experience and leading edge innovation. 2013 sees the 35th anniversary of production of large square balers at our Hesston plant and with over 25,000 large square balers produced, you don't need any more reassurance than that!

## The complete package

Massey Ferguson's range of big balers has a model for the precise size of bale you need

Model	Bale size (W x H)	Straw	Hay	Haylage	Silage	Miscanthus
MF 2240	0.80 x 0.70 m	•	•	•	•	•
MF 2250	0.80 x 0.90 m	•	•	•	•	•
MF 2260	1.20 x 0.70 m	•	•	•	•	•
MF 2270 & MF2270 XD	1.20 x 0.90 m	•	•	•	•	•
MF 2290	1.20 x 1.30 m	•	•	-	-	•

● = Baling capability, - = Not applicable



- Designed and built by the experts in Hesston, Kansas
- Class-leading productivity
- Consistently high bale density
- Quality bales that are easy to stack and transport
- Cutter and tandem axle options offer excellent productivity on all models
- Highly efficient drive system compared to other makes of baler; reduces power requirement whilst maintaining low running costs
- Low component numbers and straightforward maintenance





**Own the best, be the best**



If you want consistently high output and superior bales, you need the right equipment. The Massey Ferguson 2200 Series of large square balers is best-in-class when it comes to excellent productivity and job satisfaction.

**Be the best, choose the  
MF 2200 Series.**



## The start of a perfect bale begins with the MF 2200 Series



## Getting you the best output thanks to impressive features

One of the most impressive features on any MF 2200 Series model is the pick-up. The sheer volume of crop that each of these machines can consume has to be seen to be believed. And even though the pick-up capacity is great, the windguard with the roller crop press ensures it is still gentle on the crop.

The integrated design of the pick-up's compression spring flotation system, is key to the pick-up's terrain-following capability. The new design gives all-important ground clearance during baling and transportation.

The four 'quad' augers for the non-cutter baler provide massive pick-up capacity in all crop conditions. Positive, even feed of the crop into the packer ensures the machine can be run to

its full potential. Cutter balers have a full-width positively driven top auger to give a smoother crop feed. A solid, fully floating windguard with roller crop press is standard on all models, promoting better control of the crop at all times.

From the pick-up, the packer feeds the crop into the pre-compression chamber to form the perfect flake. Once full, the stuffer fork - timed with the plunger - feeds the flake into the bale chamber. Because the stuffer only cycles when the chamber is full, perfect even flakes are consistently produced every time.



Four 'Quad' augers ensure higher capacity feed on 'Packer' balers.



A full width auger is fitted on the 'Cutter' balers.




Compression spring pick-up suspension designed for high speed operation.




The Packer tines ensure even feed into the pre-compression chamber.

## Pre-Compression System

Massive capacity, industry leading bale density and superb shape all stem from the award winning pre-compression chamber design. Only when the chamber is perfectly full will the trip door activate and the stuffer fork powers the fully formed flake into the bale chamber.

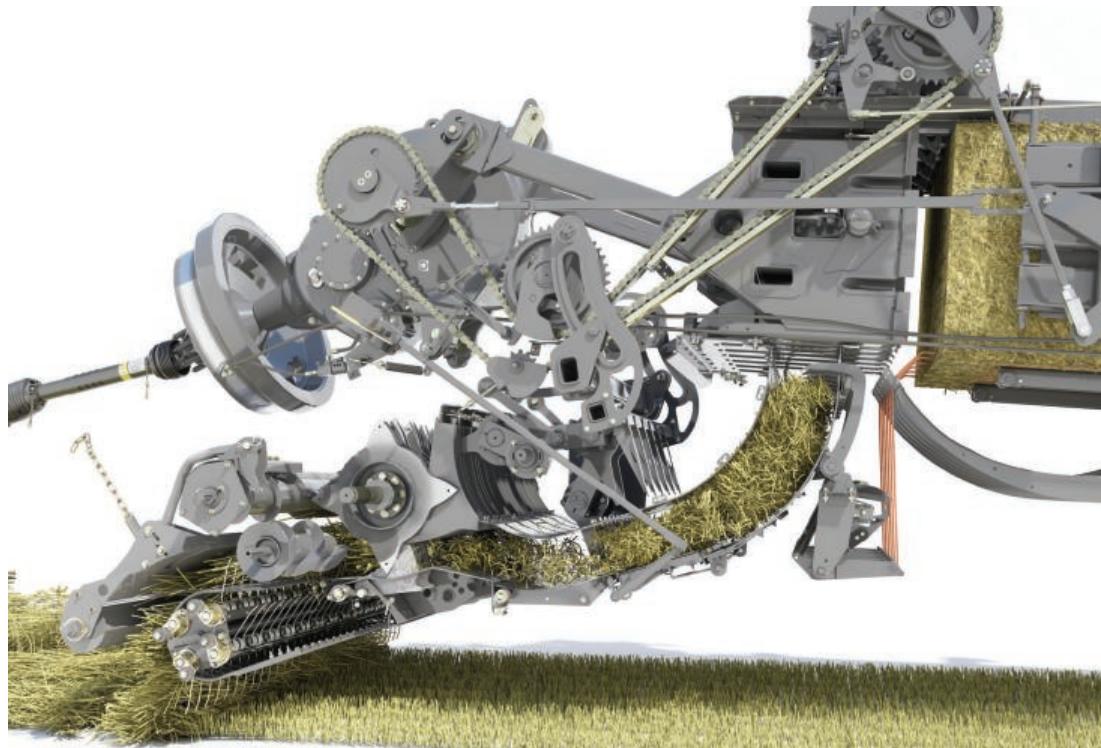


Pre-Compression Chamber - filling.

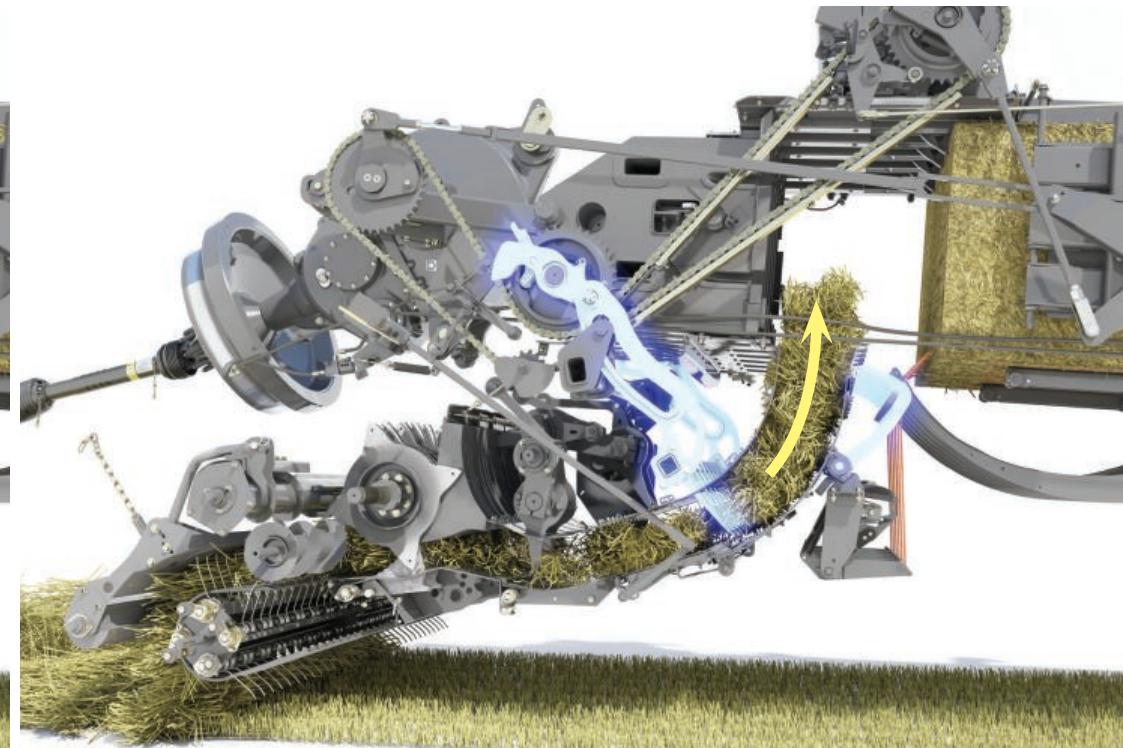

Pre-Compression Chamber - Stuffer Fork in action.

## The heaviest and strongest plunger in the industry

Driven by an enormous gearbox with massive strength, the plunger is connected via two heavy duty connecting rods. Contained in these are load cells that measure the load on the plunger face. Information from the load cells is used to control the automatic density control system and also provides the operator with driving arrow guides if uneven swaths are encountered.

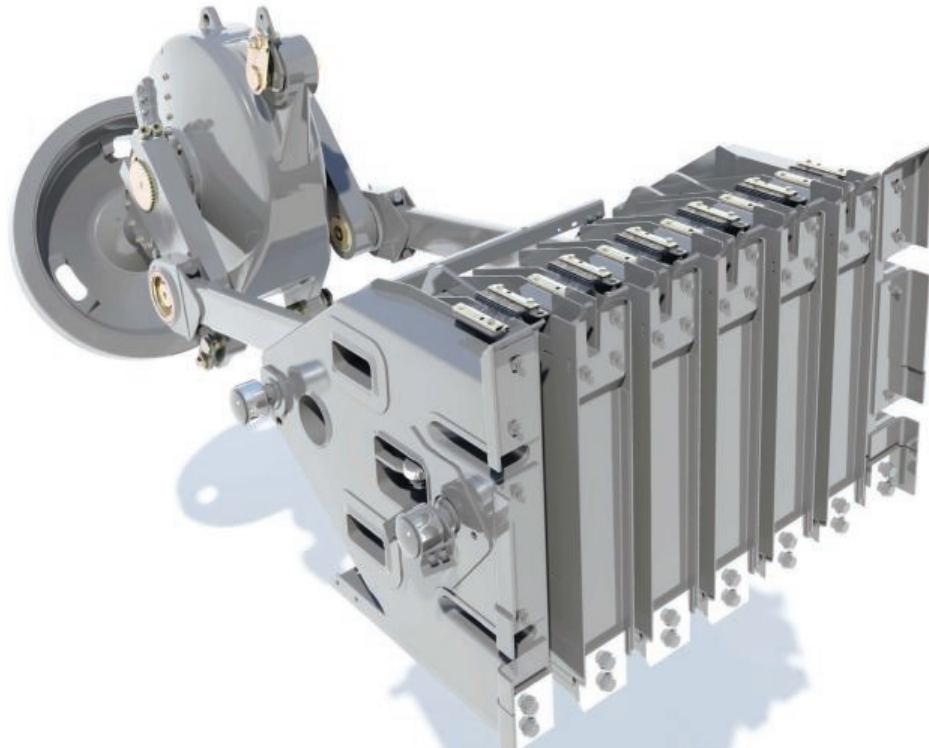

Gearbox and Plunger.



Plunger.

## OptiForm™ bale chamber

The bale chamber on the MF 2200 Series is engineered to produce bales with perfect shape and incredible density. Its design will give massive strength and year after year of reliability.

The MF 2270 XD and the MF 2290 baler feature the new **OptiForm** bale chamber, which ensures 'Optimal Formation' of the bale on these high capacity and high density models.

The doors on these two models are significantly longer than the previous models and have a refined profile which improves bale compression, ensuring even better bale shape and consistent density throughout the bale.



MF 2270 XD increased door length of **17%**,  
MF 2290 increased door length of **22%**

# Automatic density control

Double acting density rams apply pressure to both the side and top chamber doors to give consistent bale density all controlled automatically via the C1000 Baler Monitor.



Three way double acting density system.



Automatic density control through the C1000 Baler Monitor.



Density rams.

# Double-knotter system


The double-knotter system pioneered at the Hesston factory has an unrivalled record of reliability, tying many millions of bales all over the world for over 35 years. It continues to perform this vital role in the MF 2200 Series balers.

With the aim of perfect bale quality and protection, the knotters are chain-driven directly from the main gearbox, enabling plunger, knotters and needles to be precisely synchronised.


The knotter AutoLube system regularly lubricates twenty-six key points on the knotter stack helping to ensure trouble free, reliable performance bale after bale.

The new Automatic Chain Lubrication System automatically applies oil to the key chain drives on the baler. Another feature to prolong component life, minimise maintenance and lower the cost of ownership.

The optional Electronic Bale Length Control feature allows quick and simple setting of the bale length via the C1000 Baler Monitor.

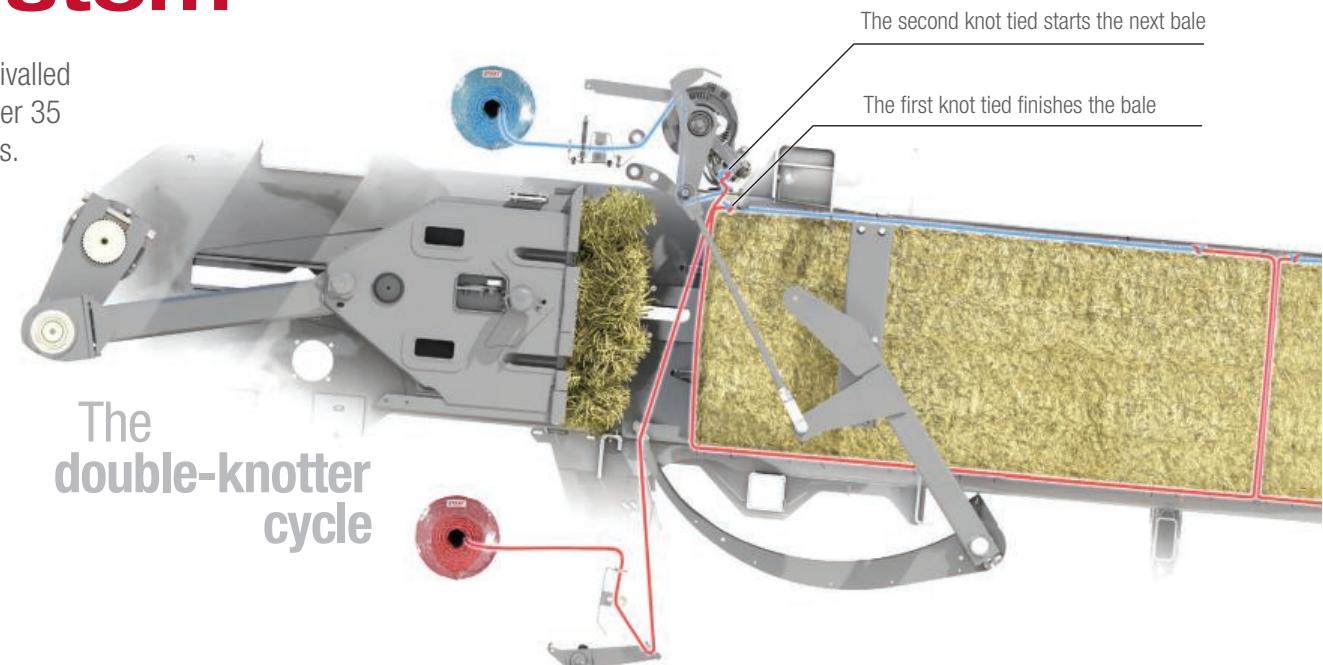

Easily accessible knotter stock.

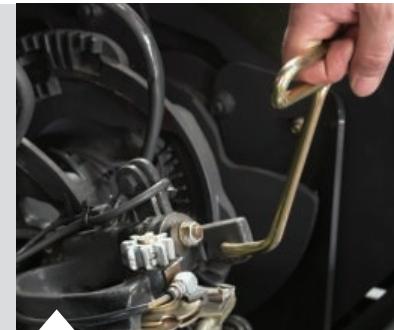


Each knotter head can easily be lifted for inspection and service.



Straight forward and reliable bale length setting. Mounted in the centre of the bale chamber, the bale length star-wheel floats with the top chamber door, ensuring that the star-wheel gets firm traction in all crop conditions for improved bale length accuracy.



AutoLube system for reduced maintenance and superb knotter reliability.

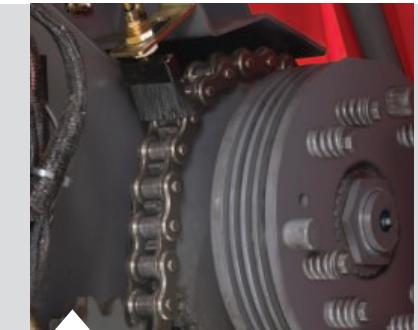

Automatic Chain Lubrication across the full width of the chain.


# Knotter blower and twine storage

## Knotter blower

Powered by a baler-mounted hydraulic pump, the standard knotter blower maintains a constant flow of air at 140 km/h through the knotter stack, instantly clearing any debris entering the knotter area. The design uses a full width, hydraulically driven turbine fan similar to the one used on our high capacity combines. These ensure superior, efficient air flow.

## Twine storage

All models carry 30 balls of twine in the 'Easy-Fill' twine boxes which is enough for the longest day's work. Productivity is increased as you don't have to refill during the day. The large dimension of each compartment allow 'super large' size twine spools to be used, enabling even more twine to be carried and therefore more bales produced per twine fill-up.

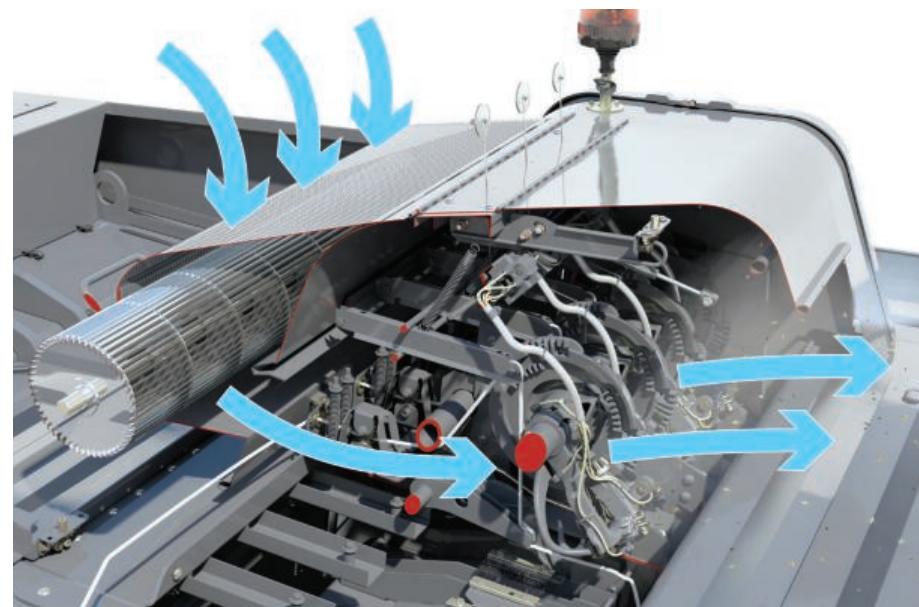

Knotter blower



The consistently perfect knot.



'Easy-fill' twine storage.



Easy placement of twine that stays in place even on hillsides.



Twine box lighting allows easy night time refilling.

## Complete control at your fingertips

The entire baling operation can be monitored from start to finish by means of the highly versatile and simple-to-use C1000 Baler Monitor, giving the operator fingertip control over each stage of the process. Acknowledged as the best monitor in the field, the console can be customised to display precisely the information that's required.

The on-board electronics system automatically ensures that every bale is the same density, regardless of swath size and forward speed, and automatically diagnoses faults.

The high quality, easy-to-read colour screen couldn't be clearer, whatever time of the day or night, and the baler itself is fully ISO-compliant so it can be used on any tractor with an ISO VT terminal.

The monitor is fully video compatible and can easily be linked up to a camera mounted at the rear of the baler.



C1000 Baler Monitor.




ISOBUS compatible.



Controlling the baler via the tractor ISO VT terminal.

## What the C1000 Baler monitor can do for you

- Set and view current load levels
- Productivity display – bales per hour
- Bale count – total and current job records
- PTO speed
- Pick-up slippage
- Optional bale weight
- Hydraulic system pressure
- Flakes per bale
- Knotter cycle and fault warnings
- Driving arrows to help ensure an even feed and consistent bale shape
- The ability to store and download field and job information via SD card or USB stick
- Full colour video compatible
- Optional electronic bale length control

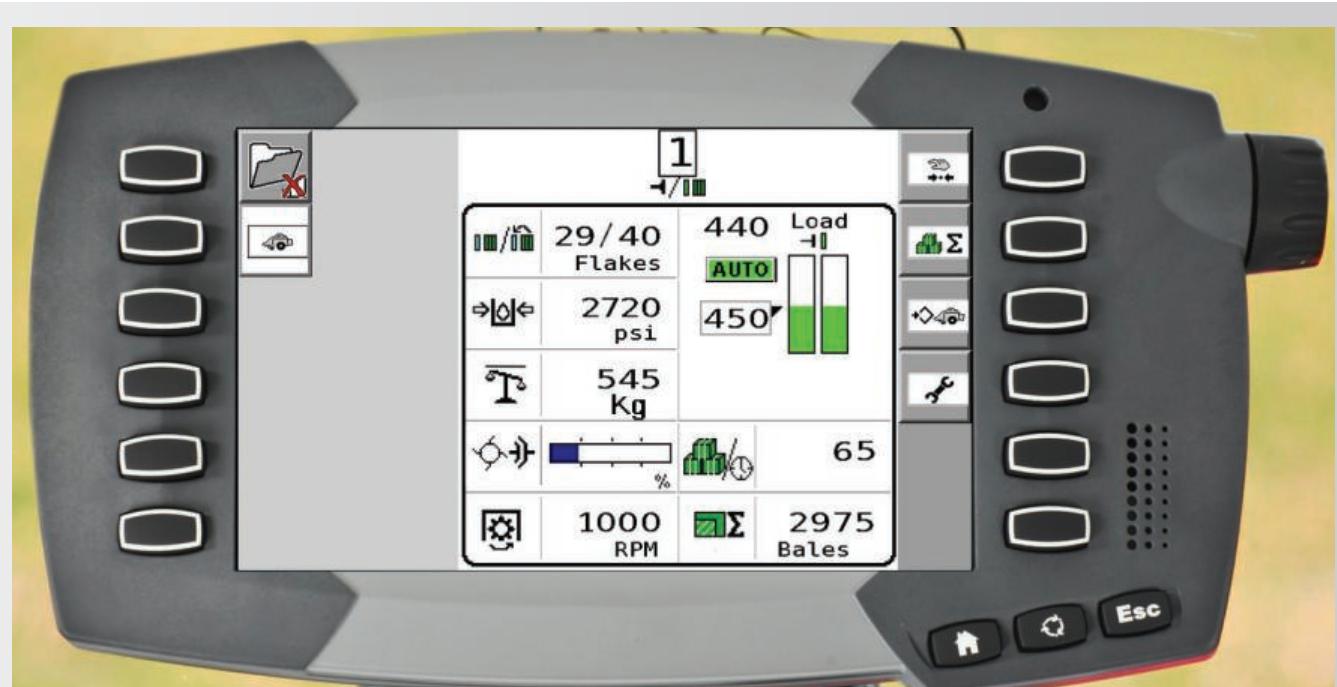

One of two operation information screens.

## MF 2270 Xtra Density baler

If you need a machine that produces bales of the highest density, then this is the machine for you. The MF 2270 XD has immense capabilities and easily produces between 15% and 20% more material per bale.\*

The Massey Ferguson 2270 XD, Extra Density, large square baler packs between 15%-20% more material into bales. \*\* Designed specifically to lower transport costs with 1.2m x 0.90m bales, this machine produces much denser and heavier bales, further helping to optimise transport space and cut costs.

The MF 2270 XD baler is capable of producing high density bales in a range of crops including hay, haylage, straw and miscanthus. To produce the high density, engineers at Hesston have re-specified the driveline, enormously strengthening the components and main chassis structure to handle extra loads.



### Massive XD Flywheel maintains momentum

The extra-strength '**XD Flywheel**' has been designed to create additional inertia and maintain the momentum needed to produce the extra density during baling operations.

Weighing in at 545 kg and, with a width of 250 mm, it is both 91% heavier and more than twice the thickness of the standard version. These flywheel dimensions produce greater plunger inertia, which increases the impact force onto the crop and helps to create the extra density.

### Extra heavy duty XD Gearbox transmits the power

To handle the extra load and flywheel force, Hesston engineers have developed a new, 35% heavier gearbox encased in a much thicker casting than the standard version. Inside, all the gears and bearings have been up rated to manage the transmission of the exceptional power throughput with, for example, the output shaft that is nearly 20% larger than the standard.

### Built to handle heavy loads

The entire driveline and structure on the MF 2270 XD has been developed specifically to provide the strength and integrity needed to handle the extra density. Heavy duty mountings now support the '**XD Gearbox**' within the robust chassis, which has also been designed to accommodate the larger '**XD Flywheel**'.

The plunger crank arms from the gearbox are the same design as those used on the top of the range and extremely well-proven, MF 2190, large square baler. These larger crank arms can cope with the increased force required to generate denser bales.

\* Than the standard MF 2270 model baler. \*\* Using appropriate high specification twine

Massive XD Flywheel **91%** heavier,  
and more than twice the thickness of the standard version

A new **OptiForm** bale chamber design not only increases the compression on the material to form the XD bales, but also does this at a lower hydraulic pressure than the standard MF 2270. Engineers at Hesston have achieved this using new '**XD Density Doors**' on the side of the chamber. These have a new, refined profile with a gradual curve which improves bale compression.



#### MF 2270 XD Extra Density features:

- '**XD Flywheel**' - twice the weight for increased energy and inertia
- '**XD Gearbox**' - with stronger, larger components and mounting points
- Improved structural integrity to handle the higher loads
- **OptiForm** bale chamber with XD density cylinders
- Standard high speed individually suspended self-steering tandem axle (up to 60 km/h depending on market legislation)
- Optional Integrated Bale Weighing System

#### MF 2270 XD Extra Density benefits:

- More material per bale
- Less bales per field - reduced field clearance time
- Reduced field transportation costs
- Reduced twine usage
- Reduced storage volume
- Reduced haulage costs

Produces between **15% & 20%**  
more material per bale

## Single or Tandem axle

Five models come with a choice of single or tandem axle and either hydraulic or optional pneumatically actuated brakes.

The single axle is rated at 40 km/h and suits many customers' needs.

Alternatively customers may wish to opt for a tandem axle version. This high specification axle features self-steering rear wheels to ensure no tyre scrubbing when turning tightly.

On high specification MF 7600 and MF 8600 Series tractors this feature can be set to activate automatically when reverse is engaged.

For operating convenience, the steering axle can be hydraulically locked in the mid position for reversing, transport and when operating on steep side hills. An axle lock status display is shown on the C1000 Baler Monitor.

The Massey Ferguson tandem axle features independent leaf springs for each wheel helping to ensure a smooth safe ride.

In-field operation is considerably smoother and the baler can safely operate at higher working speeds without causing undue stress and loads on the baler when hard and uneven ground conditions are encountered.

The tandem axle is rated to 60 km/h (where local legislation allows\*) to allow very high speed and safe road movements between fields.



MF 2240 single axle baler.

MF 2270 tandem axle baler.



Optional 620/40R22.5 radial flotation tyres.



Rear axle hydraulic steering lock.



Independent leaf-springs for each wheel.



The tandem axle allows for high road speed and gives superb ride comfort between fields.

The tandem axle is rated to **60 km/h**  
to allow high speed and safe road movements between fields\*

# Exceptional Cutting Capabilities

## Rotary Cutter

For high quality silage or chopped straw, all MF 2200 Series balers can be factory fitted with a heavy-duty cutter unit.

This unit chops the crop to your required length and the packer tines take the crop and fill the pre-compression chamber. By retaining the packer tines, the all-important quality of the flakes is not compromised.

The MF 2240 & MF 2250 have a cutter with 11 knives, whilst the MF 2260, MF 2270 and MF 2290 all have 19 knives. Three pre-set chop lengths can easily be selected using a simple selection rod and offer average chop lengths of 48, 96 or 192 mm.

Each cutter knife has its own spring loaded breakaway system to protect against foreign object damage. Combined with the superior density control of the MF baler, this allows you to achieve the finest quality feed bales and high density straw bales.



Heavy duty cutter rotor with full width powered feed auger.



Lowering of the knife bed gives easy access to the knives and aids removal of foreign objects.



Three pre-set chop lengths can be easily selected using this selection rod.



Heavy duty four-lobed spiral cutter rotor for smooth crop flow.

Three pre-set chop lengths,  
offer average chop lengths of

**48mm, 96mm & 192mm**

### Cutter benefits:

- Cutter bed can be lowered easily
- Blades can be removed or changed easily
- Cutter information is shown on the C1000 screen

### Packer Cutter


Available on the MF 2240 & MF 2250, the 'Packer Cutter' combines excellent cutting capabilities with high output and lower power consumption.

The Packer Cutter features a three stage packer to actively pull the crop across six stationary knives located in the floor of the packer chamber.

As with the full cutter baler, each cutter knife on the Packer Cutter has its own spring loaded knife breakaway system to protect against foreign object damage.



Heavy duty knives.

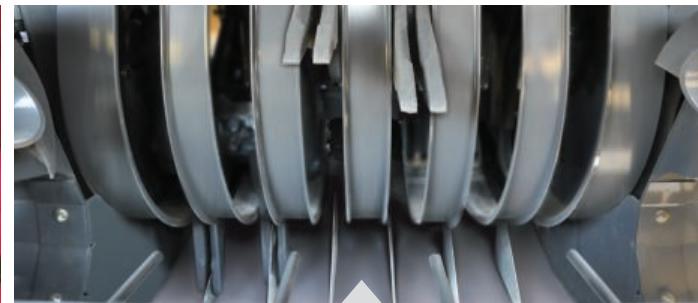

MF 2240 and MF 2250 Packer Cutter.

#### Packer Cutter benefits:


- Blades that can be removed or changed easily
- Individual spring loaded protection system for each knife
- High work rates
- Low power requirement
- Dense and well formed bales

# 'Packer Cutter'

Combines cutting capabilities with  
high output and lower power consumption

# Serviceability

Good design makes for easy work

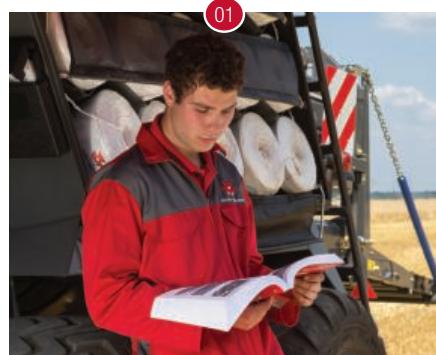


Comprehensive Operator's Manual.



Excellent access to the knotters.



Checking the cutter gearbox oil level.

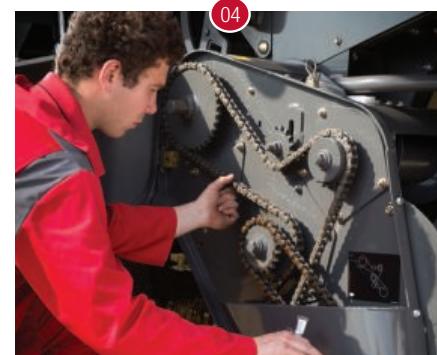

Checking the pick-up chain tensions.



Adjusting the flywheel slip clutch.



Greasing the PTO shaft.



Refilling the automatic chain oiler.



Excellent all round access.



## AGCOMMAND Baler Telemetry

AGCOMMAND takes information-gathering of the machine and the bales it produces to a new level.

By gathering information from the balers CANBUS system and transmitting it to a secure AGCO server, AGCOMMAND can provide the owner with detailed information on exactly where the baler is operating, how it is set up and what it is producing.


It is a fully automatic system that allows the operator to continue their baling operation without interruption.

Information about the baling operation is stored by a data collection unit on the machine, which is connected to a GPS antenna and GSM module. This data, with position information, is then transmitted via the mobile 'phone network to a secure AGCO server. From here owners and operators can view the information, in near 'real time', through a password protected webpage on a PC, smartphone or tablet.

AGCOMMAND collects a huge amount of information from the CANBUS to provide greater depth and detailed machine analysis. This information is quickly and easily collated into a very beneficial 'Field Summary Report' - this shows the field and crop details and bale count along with the number of flakes/bale. On machines equipped with the Integrated Bale Weighing System it also shows bale weight and a summary of field efficiencies. Much of the data can also be displayed on a field map.



AGCOMMAND Field data points.

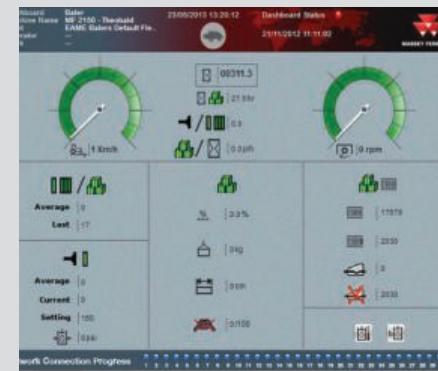

AGCOMMAND Dashboard.

Field Summary Report	
<b>Field: Beaufort Field</b>	
Resource	Wheat Straw
Variety	Solslice
Time entered field	04/10/2012 11:51:03
Time left field	04/10/2012 17:32:31
<b>Variables</b>	
Difference Bale Count - Total [ ]	184
Minimum Bale Flakes - Last [ ]	28
Maximum Bale Flakes - Last [ ]	52
Average Bale Flakes - Last [ ]	39.7
Difference Bale Weight - Total [kg]	95580
Minimum Bale Weight [kg]	430
Maximum Bale Weight [kg]	587
Average Bale Weight [kg]	527

AGCOMMAND Field Summary Report.



AGCOMMAND Combined GPS & GSM antenna.



AGCOMMAND Data collection unit.



AGCO's overarching new technology strategy is called Fuse Technologies and it will provide professional growers around the globe seamless integration and connectivity across all their farm assets. It will transform farming by delivering precision agriculture solutions that lead to reduced input costs, greater efficiency and profitability.

# Accessories

Optional extras are available to increase productivity, make light work of tough jobs and even help your business to grow.



The Integrated Bale Weighing System weighs the bale as it exits the chamber onto the roller bale chute.



Rear mounted video camera.



A video camera can be easily added to your pre-wired baler. The C1000 Baler Monitor is full colour video compatible as standard.



Highly accurate load cells for the Integrated Bale Weighing System.



Hydraulic parking jack.



K 80 ball hitch.

# Customer support

## Dedicated service and dynamic support



Massey Ferguson is a true global brand with machines operating all over the world, and behind every Massey Ferguson machine is the powerful after sales support of AGCO's Customer Support organisation.

Industry benchmarking shows that AGCO offers customers world-class parts and service support, and this is never truer than in support of our harvest machinery both in and out of season.

### In season excellence

The Harvest Support Programme is designed to be extremely dynamic and able to adapt immediately to changing conditions. Each harvest experience in every country is used to continuously enhance the comprehensive service.

**Key elements include:**

- A dedicated harvest parts warehouse guaranteeing superb parts supply and availability, and enabling a direct and rapid logistical response.
- 24/7 AGCO Parts warehouse and Customer Service facilities for MF European harvesting markets.
- Dealer direct access to on-line parts ordering 24/7 with full visibility of parts availability throughout the European warehouse network round-the-clock.
- Exceptional services such as late cut-offs, special transport, 'Euro direct' deliveries throughout Europe direct to MF dealers and customers, and collection services
- Specialist technicians with expert product knowledge supporting local markets.
- Local dealer commitment to the highest levels of service by operating 'out of hours' parts and service support.



**Year round distinction**

Naturally we recognise that supporting our harvest equipment goes beyond the harvest period.

All Massey Ferguson machinery benefits from year round focus in the form of both the exceptional standards provided by AGCO Parts as well as specific servicing packages:

- Industry-leading parts supply through AGCO Parts' state-of-the-art warehousing and logistics.
- Genuine parts from AGCO Parts, the only genuine supplier, guaranteeing the right fit, first time, every time.
- Well-qualified parts specialists and highly-trained service technicians providing dedicated service support and technical solutions.
- After sales solutions for all ages of machinery for maximum uptime in every situation.
- Specific focus on preventative maintenance through comprehensive pre- and post-season health checks.
- Long term reliability from affordable servicing and maintenance packages.

After sales support from AGCO Customer Support is about providing the best solution to our customers' needs through world-class parts and service; providing the local service to the global brand.

# Specifications

	<b>MF2240</b>	<b>MF2250</b>	<b>MF2260</b>	<b>MF2270</b>	<b>MF2270 XD</b>	<b>MF2290</b>
<b>Bale Size</b>						
Cross section (width x height)	mm 800 x 700	mm 800 x 900	mm 1200 x 700	mm 1200 x 900	mm 1200 x 900	mm 1200 x 1300
Length (maximum)	mm Up to 2740	mm Up to 2740	mm Up to 2740	mm Up to 2740	mm Up to 2740	mm Up to 2740
<b>Dimensions and Weights</b>						
Overall width - pick-up wheels installed	mm 3000	mm 3000	mm 3000	mm 3000	mm 3000	mm 3300
Overall width - optional 620 / 40 x 22.5 tyres	mm 3000	mm 3000	mm 3230	mm 3230	mm 3230	mm 3230
Overall length – bale chute in raised position	mm 8300	mm 8300	mm 8330	mm 8330	mm 8730	mm 8820
Overall height – to top of folded hand rail	mm 2695	mm 2970	mm 2695	mm 2695	mm 2870	mm 3320
Overall height – to top of raised hand rail	mm 3270	mm 3270	mm 3270	mm 3270	mm 3270	mm 3580
Weight (single axle / tandem axle, less cutter)	kg - approx. 6640 / 7240	kg - approx. 6840 / 7440	kg - approx. 8720 / 9740	kg - approx. 8940 / 9690	kg - approx. 10580	kg - approx. 10520 / 11030
Weight (single axle / tandem axle, with cutter)	kg - approx. 7470 / 8070	kg - approx. 7670 / 8270	kg - approx. 9660 / 10410	kg - approx. 9880 / 10630	kg - approx. 11520	kg - approx. 11460 / 11970
<b>Main Drive System</b>						
Flywheel diameter	mm 750	mm 750	mm 870	mm 870	mm 990	mm 870
Flywheel width	mm 110	mm 110	mm 130	mm 130	mm 250	mm 130
Flywheel weight	kg 170	kg 170	kg 290	kg 290	kg 550	kg 290
Protection						Slip clutch, overrunning clutch and shear bolt
<b>Pickup</b>						
Overall width - less pickup wheels	mm 2600					
Effective working width	mm 2260					
Number of tine bars						4 tine bars with centre carrier
Tine spacing - tine to tine	mm 66					
Drive protection						Slip and overrun clutches
Suspension						Compression Spring Floatation
<b>Packer Balers</b>						
Packer system						Fork type
Packer tines	4 hardened tines	4 hardened tines	6 hardened tines	6 hardened tines	6 hardened tines	6 hardened tines
Drive protection						Splined slip clutch
<b>Packer Cutter Balers</b>						
Packer system						Fork type
Packer tines	6 double hardened tines		N/A	N/A	N/A	N/A
Number of knives	6		N/A	N/A	N/A	N/A
Knife protection	Spring loaded		N/A	N/A	N/A	N/A
<b>Cutter Balers</b>						
Rotor diameter	mm 600	mm 600	mm 600	mm 600	mm 600	mm 600
Rotor width	mm 765	mm 765	mm 1190	mm 1190	mm 1190	mm 1190
Number of knives	0, 3, 8 or 11	0, 3, 8 or 11	0, 7, 12 or 19	0, 7, 12 or 19	0, 7, 12 or 19	0, 7, 12 or 19
Knife protection						Individual knife spring loaded

	<b>MF2240</b>	<b>MF2250</b>	<b>MF2260</b>	<b>MF2270</b>	<b>MF2270 XD</b>	<b>MF2290</b>			
<b>Plunger</b>									
Speed	47	47	47	47	47	33			
Length of stroke	740	740	740	740	740	820			
<b>Tying Mechanism</b>									
Number / type of knotters	4 double knot	4 double knot	6 double knot	6 double knot	6 double knot	6 double knot			
Twine type / capacity	High quality polypropylene / 30 ball storage								
Knotter blower	Standard - hydraulically driven								
Knotter lubrication	Standard - AutoLube automatic lubrication system to 24 points								
<b>Selectable Length Bale Ejector</b>									
Number of teeth	8 teeth in 4 rows			10 teeth in 5 rows					
Number of selectable rows	3 rows selectable								
Operation	Independent hydraulic cylinder operated from the rear of the baler								
<b>Bale Chute</b>									
Heavy duty roller bale chute	Standard								
Bale drop indicator	Standard								
Folding system for transport	Independent hydraulic cylinder operated from the rear of the baler								
<b>Axles and Tyres</b>									
Single axle tyre size	600 / 50 - 22.5	600 / 50 - 22.5	700 / 50 - 22.5	700 / 50 - 22.5	N/A	28L x 26			
Single tyre ply rating	12 Ply	12 Ply	16 Ply	16 Ply	N/A	16 Ply			
Tandem steering axle tyre size	500 / 50 - 17	500 / 50 - 17	500 / 45 - 22.5	500 / 45 - 22.5	500 / 45 - 22.5	500 / 45 - 22.5			
Tandem tyre ply rating	16 Ply	16 Ply	16 Ply	16 Ply	16 Ply	16 Ply			
Optional tandem tyre size	620 / 40 - 22.5	620 / 40 - 22.5	620 / 40 - 22.5	620 / 40 - 22.5	620 / 40 - 22.5	620 / 40 - 22.5			
Single axle maximum rated speed *	Radial	Radial	Radial	Radial	Radial	Radial			
Tandem steering axle maximum rated speed *	kph	40	40	40	40	40			
* where local legislation permits	kph	60	60	60	60	60			
<b>Control and Monitoring System</b>									
ISOBUS	ISOBUS 11783 Compatible Implement								
Implement monitor	C1000 Baler Monitor - full colour console - video compatible								
<b>Tractor Requirements</b>									
Recommended PTO horsepower - Packer	Hp /kW	140 / 105	150 / 112	160 / 120	170 / 127	200 / 150			
Recommended PTO horsepower - Packer Cutter	Hp /kW	155 / 116	165 / 123	N/A	N/A	N/A			
Recommended PTO horsepower - Cutter	Hp /kW	170 / 127	180 / 135	190 / 142	200 / 149	250 / 186			
PTO type	Type II 1 3/8" (35 mm) - 21 Spline CV PTO Shaft			Type III 1 3/4" (44 mm) 20 Spline CV PTO Shaft					
Hydraulics spool valve requirement	min / rec	2 or 3 double acting depending on specification							
<b>Variable Equipment</b>									
Air braking system		Yes							
<b>Dealer Installed Accessories</b>		Integrated Bale Weighing System, Hydraulic Parking Jack, Video Camera, Agcommand Telemetry							

\* Depending on market legislation


Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.



## Built to meet the demands of the toughest season

- 01 ISOBUS 11783 compatible implement. Allows for simple and easy connection to an ISOBUS compatible tractor – as standard.
- 02 Universal hitch designed to accommodate a wide range of hitching situations.
- 03 Floating windguard with roller crop press for the ultimate feed – as standard.
- 04 Wide high capacity pick-up with four '**Quad Augers**' for superb feeding in all crops and conditions.
- 05 Easily removable pick-up gauge wheels – as standard.
- 06 Choice of configuration; '**Packer**', '**Cutter**', or '**Packer Cutter\***' variants.
- 07 Pre-compression chamber ensures a full flake of material is loaded into the bale chamber, even when baling small swaths.
- 08 Single or tandem axles with hydraulic or air brakes.
- 09 Optional - 620/40-22.5 floatation tyres.
- 10 '**Easy-fill**' string boxes, enough for a full day's work with capacity for 30 'super size' balls of twine.
- 11 Selectable length bale ejector – as standard.
- 12 '**OptiForm**' bale chamber – MF 2270 XD and MF 2290.
- 13 Optional – Integrated Bale Weighing System. Straight forward and accurate.
- 14 Heavy duty roller bale chute – as standard.
- 15 Highly reliable and dependable double-knotter system.
- 16 Optional – Electronic Bale Length Control.
- 17 Fully integrated, hydraulically driven, powerful knotter blower ensures trouble free knotter performance – as standard.
- 18 Fully integrated automatic AutoLube knotter lubrication system – as standard.
- 19 Automatic Chain Lubrication System – as standard.
- 20 Fully integrated on-board hydraulics. No matter what hydraulic system your tractor has the baler hydraulics for the density control and knotter fan are completely independent.

\* 'Packer Cutter' variant only available on MF 2240 & MF 2250 models.

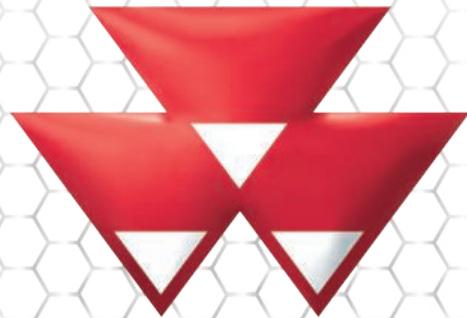

# MASSEY FERGUSON

**A world of experience. Working with you.**



[facebook.com/AGC0corp](http://facebook.com/AGC0corp)  
[twitter.com/AGC0corp](http://twitter.com/AGC0corp)  
[youtube.com/AGC0corp](http://youtube.com/AGC0corp)  
[ustream.tv/channel/AGC0chat](http://ustream.tv/channel/AGC0chat)  
[blog.agcocorp.com](http://blog.agcocorp.com)



**MASSEY FERGUSON** is a worldwide brand of AGCO.  
© AGCO Limited. 2013 | 15546/0114 | A-English/0114/5m



Responsible forest management

